




## 1310T TEMPERATURE RESISTANCE STANDARD

Designed & Developed for Temperature Laboratories

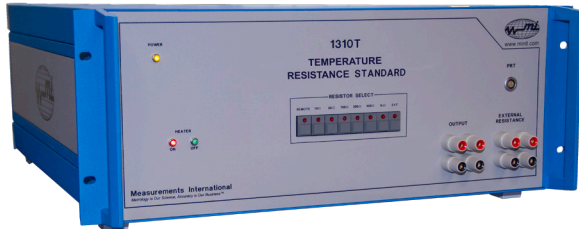

### Featuring

- ▶ Exceptional Stability
- ▶ Cost-effectiveness
- ▶ Performance-based Results
- ▶ 10 Ω, 25 Ω, 100 Ω, 200 Ω, 400 Ω and 1000 Ω Internal Standards
- ▶ Built-in Temperature Chamber for Optimal Performance

### Overview

Measurements International's new Temperature Resistance Standard 1310T is an easy-to-use automated resistance standard for temperature laboratories. The 1310T consists of 6 resistors and a connection for an external resistor, housed in a temperature-controlled chamber that utilizes a built-in 4-terminal scanner for optimal performance. The six resistor values 10 Ω, 25 Ω, 100 Ω, 200 Ω, 400 Ω

and, 1000 Ω, cover all of your temperature laboratory requirements. For customers who require even more, additional resistors can be added as a customized feature. Customers can now eliminate sources of error due to changing connections. Resistors are all housed in a temperature-controlled internal chamber eliminating the need for external temperature control.

Feature	Benefit
6 resistors values 10 Ω, 25 Ω, 100 Ω, 200 Ω, 400 Ω and 1000 Ω.	One box covers all your temperature measurement requirements.
One box for all temperature lab applications.	Customers only need to buy one piece of equipment that contains all the required standards.
The unit has an internal temperature chamber.	No external temperature chamber is required, and no external scanner required.
Easy connection and change for resistors.	Customers do not need to re-wire connections as the unit has a built-in scanner board for automation and ease of use.
Resistors based on proven resistor design with 24-hour stability of better than $\pm 0.01 \mu\Omega/\Omega$ .	Customers can achieve world-leading specifications in one cost-efficient solution.
Built-in 4-terminal scanner.	Combining two instruments into one simple-to-use instrument.
External extra channel.	Connect to the resistance value of your choice.
Front panel or GPIB controlled.	Simplifies operation for the user.
Internally mounted temperature sensor PT100.	Users can connect to the front panel and monitor the internal oven.



## 1310T TEMPERATURE RESISTANCE STANDARD

### Specifications: Rev 1

Nominal Resistance ( $\Omega$ )	Tolerance ( $\pm \mu\Omega/\Omega$ ) ( $\pm$ ppm)	24-Hour Stability ( $\pm \mu\Omega/\Omega$ ) ( $\pm$ ppm)	12-Month Stability ( $\pm \mu\Omega/\Omega$ ) ( $\pm$ ppm)	Temperature Coefficient ( $\pm \mu\Omega/\Omega/^\circ\text{C}$ ) ( $\pm$ ppm/ $^\circ\text{C}$ )	Max. Voltage (V)
10	10	0.01	2.5	0.005	1.0
25	10	0.01	2.5	0.005	1.58
100	10	0.01	2.5	0.005	3.16
200	10	0.01	2.5	0.005	4.47
400	10	0.01	2.5	0.005	6.32
1000	10	0.01	2.5	0.005	10.0
<b>Internal Temperature Stability</b>			$\pm 0.1$ $^\circ\text{C}$ Over a 1-Year Period		
<b>Ambient Temperature Range</b>			23 $^\circ\text{C} \pm 5$ $^\circ\text{C}$		
<b>Ambient Humidity Range</b>			20 to 70 % RH		
<b>Warranty</b>			Standard 2-Year Parts & Labour		

### Scanner Specifications

<b>Operation</b>	Four-Terminal
<b>Error Contribution</b>	< 20 nV
<b>Contact Configuration</b>	Relay – Two Coil Latching
<b>Max Carrying/Switching Current</b>	4/2 A @ < 30 V (DC)
<b>Maximum Working/Switching Voltage</b>	1000/220 V @ < 100 mA (DC)
<b>Contact Resistance</b>	< 0.05 $\Omega$
<b>Expected Relay Life</b>	10 <sup>8</sup> Operations
<b>Insulation Resistance</b>	> 10 <sup>12</sup> $\Omega$

**Dimensions (L x W x H):**  
572 x 445 x 203 (mm)

**Weight:**  
9 kg

**Shipping Weight:**  
13 kg

**Mains Power:**  
85 to 264 V<sub>ac</sub>, -47 to 440 Hz

**Corporate Headquarters**  
Measurements International  
PO Box 2359, 118 Commerce Drive  
Prescott, Ontario, Canada K0E 1T0  
Phone: 613-925-5934  
Fax: 613-925-1195  
Email: sales@mintl.com  
Toll Free: 1-800-324-4988

